

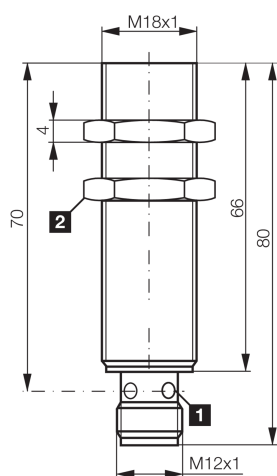


UCC 18 M 05 S-IBSL

- Service voltage 20 ... 250 V AC, 10 ... 250 V DC
- Protection class IP 67
- Metal connector
- Integrated amplifier
- Short-circuit protection
- LED/ring-LED

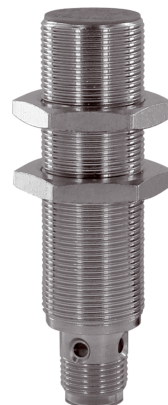

2) Width over flats 24 mm

CE

© di-soric . Right to change reserved . 03.02.2022 . Page 1



201753
UCC 18 M 05 S-IBSL
Inductive proximity sensor

Technical data (typ.)

Connection cable

+20°C, 24 V DC

VK ...

More information / accessories

<https://www.di-soric.com/201753>