
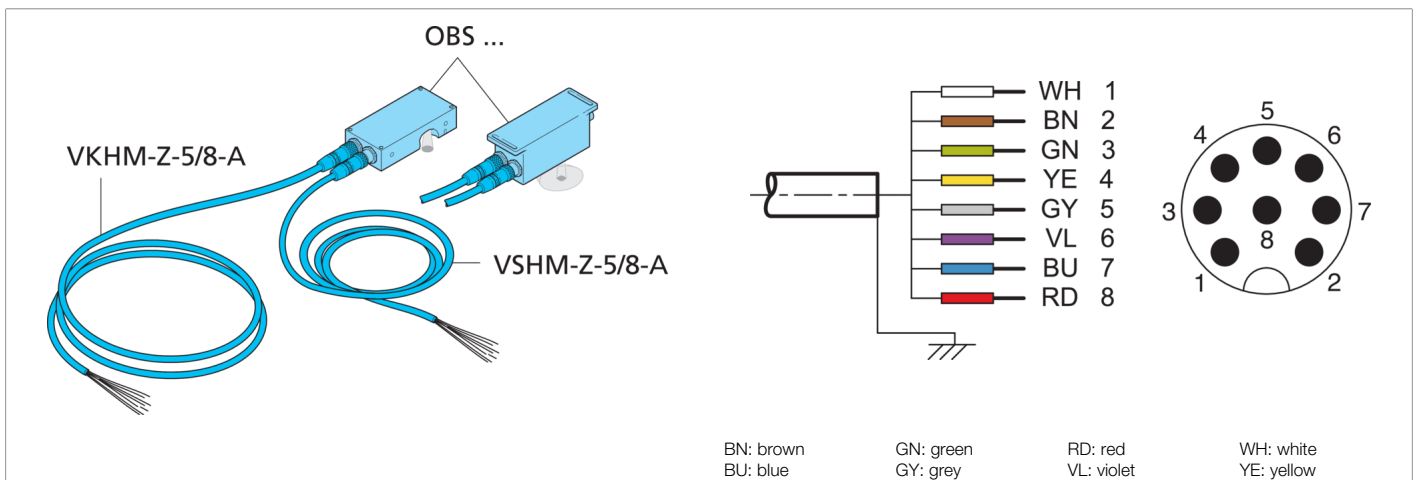


204562
VSHM-Z-5/8-A
Connection cable

- Shielded
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

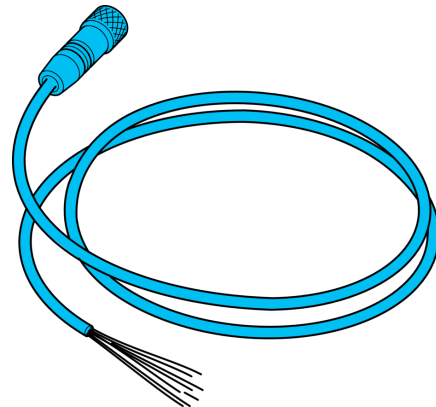

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	< 30 V AC/DC
Length	5.000 mm
Diameter	Ø 7,0 mm (Diameter)
Thread	M12 x 1
Material	<ul style="list-style-type: none"> ■ Polyurethane (Cable) ■ Polyurethane (Connector)
Drag chain properties	<ul style="list-style-type: none"> ■ > 5 Mio. (Bending cycles) ■ 70 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Connector, M12, 8-pin
Cross-section	0,25 x 0,25 mm (8 x)

More information / accessories <https://www.di-soric.com/204562>