



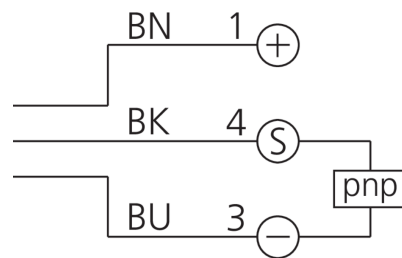

200446
DCCK 08 M 1.5 PSK-TSL
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

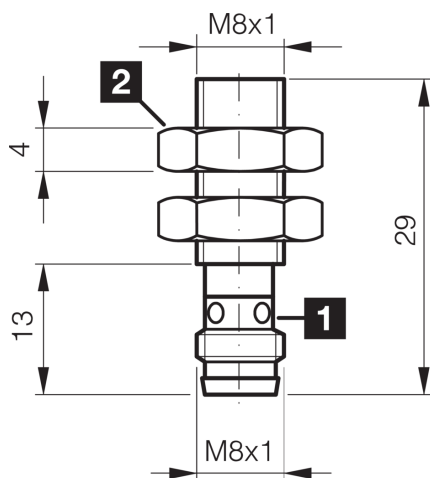

1) LED 4 x 90° (yellow)

2) Width over flats 13 mm

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	< 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	Flush
Thread	M8 x 1
Housing length	29 mm
Housing material	Stainless steel (V2A)
Tightening torque (max.)	4 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Product series	INS Standard
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Switching distance (SN)	1,5 mm
Standardized measuring plate	8 x 8 x 1 mm
Switching hysteresis (max.)	5 %
LED Anzeige	Yes
Switching frequency	5.000 Hz
Ambient temperature during operation	-25 ... +70 °C

**200446****DCCK 08 M 1.5 PSK-TSL****Inductive proximity sensor****Technical data (typ.)****+20°C, 24 V DC**

Protection type

IP 67

Connection

Connector, M8, 3-pin

Connection cable

TK ...

More information / accessories<https://www.di-soric.com/200446>