

## IBR40175

### INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, Ø4mm 27long, Flush, Sn: 0.8, 10-30V DC, PNP NO,  
Cable connector M8 0.2m, IP67, Stainless steel 1.4305



#### MECHANICAL FEATURES

Active area material of sensor	PA 6.1 GF15
Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 70 °C
Cable infeed	Axial
Cable length	0.2 m
Degree of protection (IP)	IP67
Design	Cylinder plain
Housing material	Stainless steel 1.4305
Mechanical mounting condition for sensor	Flush
Pressure-proof	-
Sensor diameter	4 mm
Sensor length	27 mm

#### ELECTRICAL FEATURES

Cascadable	-
Correction factor (aluminum)	0.5
Correction factor (brass)	0.55
Correction factor (copper)	0.45
Correction factor (St37)	1
Correction factor (stainl. steel)	0.8
Hysteresis	10 %
No-load current	10 mA
Norm measuring plate	4x4x1
Operating voltage	10 V ... 30 V
Rated switching current	200 mA
Relative repeat accuracy	1.25 %
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Switching distance	0.8 mm
Switching frequency	5000 Hz
Type of electrical connection	Cable connector M8
Type of switching function	Normally open contact

## ELECTRICAL FEATURES

Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	+


## Other

Packaging dimensions	100mm x 17.0mm x 120mm
Shipping weight	0.02kg
Tariff code	85365019

## Classification

ipf product group	203
eClass 8.0	27270101
eClass 9.0	27270101
eClass 9.1	27270101
ETIM-5.0	EC002714
ETIM-6.0	EC002714
ETIM-7.0	EC002714

## Connection

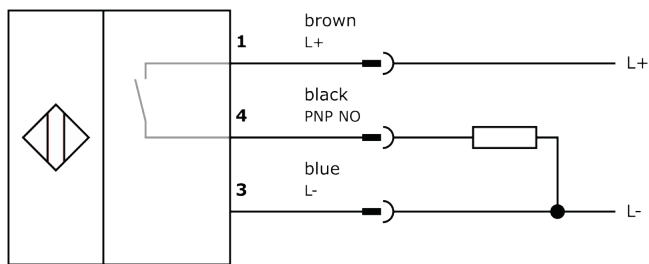

## Dimensional drawing

### Installation



Mounting / installation may only be carried out by a qualified electrician!

### Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.